

KEY NOTE SCHEDULE:

CODE	DESCRIPTION	DETAIL
1	4" CONCRETE	1/L5.0
2	6" CONCRETE	2/L5.0
3	BACKSTOP WALL	1/L6.1
5	BACKSTOP NETTING	6/L6.1
7	HOMEPLATE FORMING SYSTEM	2/L6.2
8	DOUBLE SOCKET BASE ANCHOR	3/L6.4
9	SINGLE SOCKET BASE ANCHOR	3/L6.4
10	FOUL POLE	4/L6.2
12	DUGOUT SHADE STRUCTURE	1/L6.4
13	SAND BASE SOD OUTFIELD	2/L6.2
14	SYNTHETIC TURF	1/L6.2
15	PIPE RAIL GATE	5/L6.4
16	FLAG POLE	12/L5.0
17	PITCHING RUBBER	6/L6.2
18	BOLLARD	6/L6.4
19	SCOREBOARD	3/L6.3
20	WHEEL STOP	4/L6.3

LEGEND:

	PROPOSED 4" CONCRETE
	PROPOSED 6" CONCRETE
	PROPOSED GRAVEL INFIELD BASE
	PROPOSED SAND OUTFIELD BASE
	PROPOSED FENCE
	EXIST. DITCH
	EXIST. SANITARY SEWER SERVICE LINE
	EXIST. OVERHEAD ELECTRIC LINE
	EXIST. WATER LINE
	EXIST. FENCE
	EXIST. DROP INLET
	EXIST. POWER POLE
	EXIST. LIGHT POLE
	EXIST. FIRE HYDRANT

GENERAL LAYOUT NOTES:

- CONTRACTOR SHALL COORDINATE ON SITE WITH LANDSCAPE ARCHITECT (QUALITY ENGINEERING & SURVEYING, 225-698-1600) PRIOR TO LAYOUT AND START OF CONSTRUCTION.
- ALL RADII SHALL BE FORMED AS SMOOTH CIRCULAR ARCS WITH NO KINKS, FACETS OR TANGENTS.
- CONTRACTOR TO FIELD STAKE LOCATIONS OF PAVEMENT AND SITE AMENITIES FOR APPROVAL BY LANDSCAPE ARCHITECT AND OWNER PRIOR TO START OF CONSTRUCTION.
- CONTRACTOR SHALL SEEK LAYOUT APPROVAL PRIOR TO INSTALLATION. IF FEATURES ARE LOCATED OR BUILT INCORRECTLY, THE CONTRACTOR SHALL REDO WORK AT NO COST TO THE OWNER OR LANDSCAPE ARCHITECT.
- ALL LINES AND DIMENSIONS ARE PARALLEL OR PERPENDICULAR TO THE LINES FROM WHICH THEY ARE MEASURED UNLESS OTHERWISE INDICATED.
- THE CONTRACTOR SHALL ESTABLISH PERMANENT CONSTRUCTION BENCHMARKS. MAINTAIN ALL ESTABLISHED BOUNDS AND BENCHMARKS AND REPLACE AS DIRECTED ANY WHICH ARE DESTROYED OR DISTURBED.
- CONTRACTOR IS RESPONSIBLE FOR ALL DAMAGE DUE TO OPERATIONS INSIDE AND OUTSIDE OF THE LIMIT OF WORK. ANY AREAS OUTSIDE THE LIMIT OF WORK THAT ARE DISTURBED SHALL BE RESTORED TO ITS ORIGINAL CONDITION AT NO ADDITIONAL COST TO THE OWNER.
- ALL DIMENSIONS ARE TO THE EDGE OF PAVEMENT / BACK OF CURB UNLESS OTHERWISE NOTED

UTILITY NOTE:

THE CONTRACTOR SHALL BE RESPONSIBLE FOR DETERMINING THE EXACT LOCATION, DEPTH AND SIZE OF ALL UNDERGROUND UTILITIES AND STRUCTURES AND SHALL BE LIABLE FOR ANY DAMAGE CAUSED BY FAILURE TO COMPLY WITH THESE INSTRUCTIONS.

NOTE:

ALL SYNTHETIC TURF FIELD SUB-BASE PREP INCLUDING GRADING AND COMPACTION TO BE COMPLETED BY SYNTHETIC TURF SUBCONTRACTOR.


REV1: BID ADDENDUM 2 (2024-10-23)

ADDED ADA STRIPING, WHEELSTOPS AND ADA SIGNAGE

Client: PARISH OF ASCENSION GOVERNMENT
 6151 WARDEN ST. CONZALE, LA
 Project: PRAIRIEVILLE PARK RENOVATIONS
 18300 HWY 42 PRAIRIEVILLE, LA

GEOMETRIC LAYOUT PLAN

LOCATED IN SECTION 36, TOWNSHIP 8S, RANGE 2E, South Eastern East of the Mississippi, ASCENSION PARISH, LOUISIANA
 DWG Paths: P:\2023 Projects\23-270 - Prairieville Park Renovations\2 - Landscape Architecture\1 Drawings\02-270-02-01.dwg

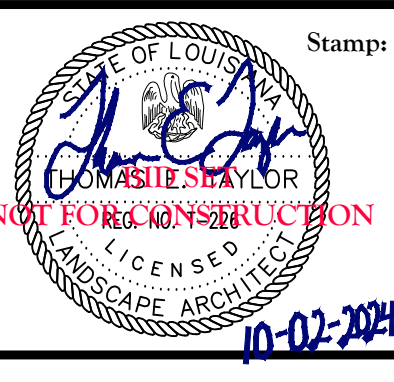

Drawn By: TT

Date: OCTOBER 2024

Project No.: 23-270

Sheet: L1.0



BY LAW, ANYONE PLANNING MECHANIZED DIGGING OR EXCAVATION WORK IN LOUISIANA MUST NOTIFY LOUISIANA ONE CALL BY CALLING 811 OR 1-800-272-3020 OR BY GOING TO THEIR WEBSITE AT WWW.LOUISIANA811.COM AT LEAST TWO FULL BUSINESS DAYS PRIOR TO THE PROJECTS START DATE.